




HTTP://www.cngold-dragon.com

WE ARE THERE
WHENEVER YOU NEED US.

We will be happy to answer any questions you may have concerning our company or our products. Simply call or email us – any time.



[Http://www.cngold-dragon.com](http://www.cngold-dragon.com)

QINGDAO GOLD-DRAGON CO.,LTD

PLASTIC PRODUCTS





QINGDAO GOLD-DRAGON CO., LTD

BRIEF Introduction

QINGDAO GOLD-DRAGON CO. LTD. IS ONE OF LEADING PRODUCER AND EXPORTERS IN CHINA FOR PVC PRODUCTS . WE HAVE OUR OWN FACTORY - WEIFANG GOLD-DRAGON PVC HOSE MFG.

OUR PVC HOSES PRODUCT MAINLY INCLUDING:

- PVC GARDEN HOSES WITH FITTINGS
- PVC GARDEN HOSES WITHOUT FITTINGS
- PVC TRANSPARENT HOSES
- PVC FIBER REINFORCED HOSES
- PVC STEEL WIRE REINFORCED HOSES
- PVC MIXED RUBBER AIR HOSES
- PVC HIGH PRESSURE AIR HOSES
- PVC SUCTION HOSES
- PVC LAYFLAT HOSES
- EVA HOSES
- SOAKER HOSES
- FIRE HOSES
- PLASTIC GARDEN FITTING AND SPRAY SERIAL



SINCE BUILT FROM 1990S, WE LEARNED GOOD SKILL TO COOPERATE WITH OUR CUSTOMERS FROM DIFFERENT MARKETS.

BASED ON THE PRINCIPLE OF "SUITABLE QUALITY, HIGH SERVICE, AND HIGH EFFICIENCY", WE DO HOPE TO BUILD BUSINESS RELATION WITH YOU TO ACHIEVE THE MUTUAL BENEFIT.

[Http://www.cngold-dragon.com](http://www.cngold-dragon.com)

WEIFANG GOLD-DRAGON PVC HOSE MFG.



PVC GARDEN HOSE

PVC GARDEN HOSE: BLACK & GREEN, 3 LAYER




Multipurpose "BLACK & GREEN " garden hose with braided reinforcement: 3 layers

- 1> INNER LAYER IN ALGAE-PROOF PVC
 - 2> BRAID IN POLYESTER
 - 3> OUTER LAYER IN UV RAY-PROOF PVC BARIUM, CADMIUM AND LEAD FREE.
- 8 BAR WORKING PRESSURE,
20 BAR BURSTING PRESSURE
WORKING TEMPERATURE FROM -10°C TO +50°C

PACKAGE:

SIMPLE PACKAGE, OR LABEL WITH SHRINK FILM OR AS PER BUYER'S REQUEST

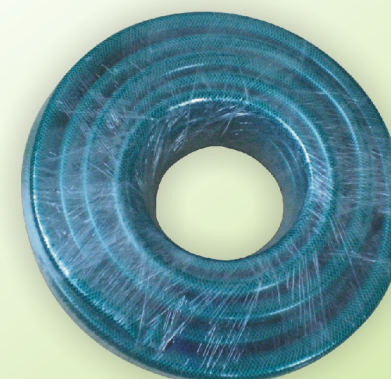

Popular sizes:

1/2" x 15mtrs	5/8" x 15mtrs	3/4" x 15mtrs	1" x 15mtrs
1/2" x 20mtrs	5/8" x 20mtrs	3/4" x 20mtrs	1" x 20mtrs
1/2" x 25mtrs	5/8" x 25mtrs	3/4" x 25mtrs	1" x 25mtrs
1/2" x 50mtrs	5/8" x 50mtrs	3/4" x 50mtrs	1" x 50mtrs

PVC GARDEN HOSE

PVC GARDEN HOSE WITH PLASTIC FITTING: 3 LAYER



HOSE KITS: PVC GARDEN HOSE

- 1> INNER LAYER IN ALGAE-PROOF PVC
- 2> BRAID IN POLYESTER
- 3> OUTER LAYER IN UV RAY-PROOF PVC

THE KIT CONTAINS 4 PCS OF HOSE CONNECTORS
BARIUM, CADMIUM AND LEAD FREE.
8BAR WORKING PRESSURE,
20 BAR BURSTING PRESSURE
WORKING TEMPERATURE FROM -10°C TO +50°C

PACKAGE:
LABEL WITH SHRINK FILM OR
AS PER BUYER'S REQUEST


Popular sizes:

1/2" x 15mtrs	5/8" x 15mtrs	3/4" x 15mtrs
1/2" x 20mtrs	5/8" x 20mtrs	3/4" x 20mtrs
1/2" x 25mtrs	5/8" x 25mtrs	3/4" x 25mtrs



PVC GARDEN HOSE

PVC GARDEN HOSE WITH BRASS COUPLING:



1. ECONOMIC DUTY: 3 LAYER

- 1> INNER LAYER IN ALGAE-PROOF PVC
- 2> BRAID IN POLYESTER
- 3> OUTER LAYER IN UV RAY-PROOF PVC

COUPLING: AMERICAN STYLE BRASS COUPLING
BARIUM, CADMIUM AND LEAD FREE.

8BAR WORKING PRESSURE,
20 BAR BURSTING PRESSURE

WORKING TEMPERATURE:
FROM -10°C TO +50°C

PACKAGE:
LABEL WITH
SHRINK FILM
OR AS PER
BUYER'S REQUEST



Popular sizes:

1/2" x 25'	5/8" x 25'	3/4" x 25'	1" x 25'
1/2" x 50'	5/8" x 50'	3/4" x 50'	1" x 50'
1/2" x 75'	5/8" x 75'	3/4" x 75'	1" x 75'
1/2" x 100'	5/8" x 100'	3/4" x 100'	1" x 100'


2. HEAVY DUTY: 4 LAYER

- 1> INNER LAYER IN ALGAE-PROOF PVC
- 2> BRAID IN POLYESTER
- 3> MIDDLE LAYER IN PVC
- 4> OUTER LAYER IN UV RAY-PROOF PVC.
BARIUM, CADMIUM AND LEAD FREE

COUPLING: HEAVY DUTY BRASS COUPLING
10 BAR WORKING PRESSURE,
25 BAR BURSTING PRESSURE

WORKING TEMPERATURE: FROM -10°C TO + 60°C

PACKAGE:
LABEL WITH SHRINK FILM
OR AS PER BUYER'S REQUEST



Popular sizes:

1/2" x 25'	5/8" x 25'
1/2" x 50'	5/8" x 50'
1/2" x 75'	5/8" x 75'
1/2" x 100'	5/8" x 100'

PVC GARDEN HOSE

BLACK & YELLOW COLOR

3 LAYERS GARDEN HOSE

- 1> INNER LAYER IN ALGAE-PROOF PVC
 - 2> BRAID IN POLYESTER
 - 3> OUTER LAYER IN UV RAY-PROOF PVC BARIUM, CADMIUM AND LEAD FREE.
- 8BAR WORKING PRESSURE,
20 BAR BURSTING PRESSURE

WORKING TEMPERATURE:
FROM -10°C TO +50°C

PACKAGE:
LABEL WITH SHRINK FILM OR
AS PER BUYER'S REQUEST




PVC GARDEN HOSE WITH 4 LAYERS

- 1> INNER LAYER IN ALGAE-PROOF PVC
 - 2> BRAID IN POLYESTER
 - 3> MIDDLE LAYER IN PVC
 - 4> OUTER LAYER IN UV RAY-PROOF PVC. BARIUM, CADMIUM AND LEAD FREE
- 10 BAR WORKING PRESSURE,
25 BAR BURSTING PRESSURE

WORKING TEMPERATURE:
FROM -10°C TO + 60°C

PACKAGE:
LABEL WITH SHRINK FILM OR AS PER BUYER'S REQUEST

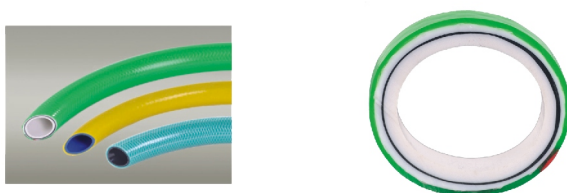

BLUE & YELLOW COLOR

3 LAYERS GARDEN HOSE WITH SUPER
BRAIDED REINFORCEMENT

- 1> INNER LAYER IN FOOD-GRADE PVC
 - 2> BRAID IN POLYESTER
 - 3> OUTER LAYER IN UV-RAY PROOF AND ALGAE-PROOF PVC BARIUM, CADMIUM AND LEAD FREE
- 12 BAR WORKING PRESSURE,
30 BAR BURSTING PRESSURE

WORKING TEMPERATURE:
FROM -20°C TO + 60°C


PACKAGE:
LABEL WITH SHRINK FILM OR
AS PER BUYER'S REQUEST



Popular sizes:

1/2" x 15mtrs	5/8" x 15mtrs	3/4" x 15mtrs	1" x 15mtrs
1/2" x 25mtrs	5/8" x 25mtrs	3/4" x 25mtrs	1" x 25mtrs
1/2" x 50mtrs	5/8" x 50mtrs	3/4" x 50mtrs	1" x 50mtrs

PVC NON-TORSION HOSE(GARDEN HOSE)

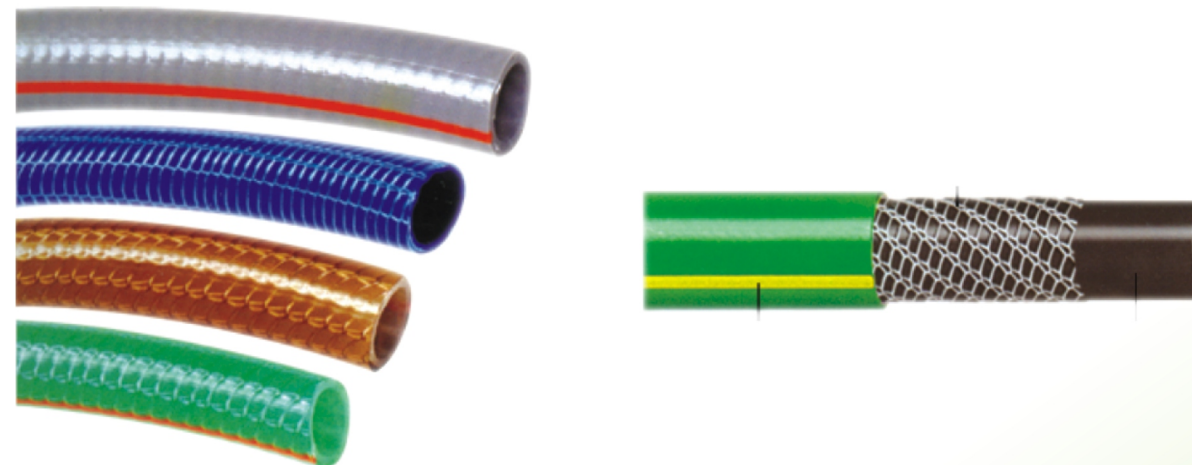

APPLICATIONS:

APPLICABLE TO ALL KINDS OF LANDSCAPE WATER, VEHICLE WASHING AND CLEARING, COMMUNITY AND FAMILY, IS A GOOD HOSE CONVEYING AIR, WATER, OIL AND OTHER LIQUID, GAS.

CHARACTERISTIC:

DUE TO ITS UNIQUE STRUCTURE, THIS HOSE POSSESS SOME SPECIAL ADVANTAGES, SUCH AS NON-TORSION, NON-TWIST. SO THE WATER AND OTHER LIQUID CAN GO THROUGH IT MORE SMOOTHLY. AND THE BLACK ANTI ALGAE LAYER CAN EFFICIENTLY STOP THE ALGAE GROWING.

WORKING TEMPERATURE:

FROM -5°C TO + 65°C

The regular specification of PVC non-torsion hose

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll
1/2"	12	17	15	0.8	2.5	2.3
1/2"	12	17	25	0.8	2.5	3.7
1/2"	12	17	50	0.8	2.5	7.5
5/8"	15	22	15	0.7	2.0	4.1
5/8"	15	22	25	0.7	2.0	6.7
5/8"	15	22	50	0.7	2.0	13.5
3/4"	19	25	25	0.6	1.8	6.9
3/4"	19	25	50	0.6	1.8	14
1"	25	31	25	0.5	1.6	8.9
1"	25	31	50	0.5	1.6	17.5

PVC FIBER REINGORCED SOFT HOSE

APPLICATIONS:

THE PRODUCT IS USED FOR CONVEYING WATER, OIL, GAS UNDER NORMAL WORKING CONDITION IN THE FACTORY, FARM, SHIP, BUILDING AND FAMILY.

CHARACTERISTICS:

IT IS FLEXIBLE, TRANSPARENT, DURABLE, NON-TOXIC, WITHOUT ORDER, ANTI-EROSION AND ADAPTABLE TO HIGH PRESSURE CONDITION. BY ADDING COLORFUL SYMBOL LINES ON THE SURFACE OF THE HOSE, IT LOOKS MOR BEAUTIFUL.

WORKING TEMPERATURE:

FROM -5℃ TO + 65℃



■ The regular specification of PVC fiber reinforced soft hose

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m³
1/5"	5	9	168	0.9	3	10	0.024
1/4"	6	9	180	0.8	2.5	10	0.024
	6	10	147	0.9	2.7	10	0.024
	6	11	111	1	3	10	0.024
	6	12	87	1.2	3	10	0.024
5/16"	8	11.4	143	0.7	2.4	10	0.029
	8	12	118	0.9	2.4	10	0.027
	8	13	90	1	3	10	0.253
	8	14	71	1.2	3.2	10	0.027
3/8"	9	13	107	0.7	2.7	10	0.026
	9	14	82	0.8	3	10	0.026
	10	13.6	110	0.6	2.4	10	0.026
	10	14	98	0.7	2.4	10	0.03
1/2"	10	15	75	0.8	2.5	10	0.028
	10	16	60	0.9	2.8	10	0.028
	12	16	168	0.6	2	20	0.064
	12	17	130	0.7	2.1	20	0.064
5/8"	12	17.5	116	0.8	2.4	20	0.064
	12	18	105	0.9	2.7	20	0.064
	13	17	157	0.5	1.5	20	0.064
	13	18	122	0.6	1.8	20	0.064
1"	13	19	98	0.7	2.1	20	0.064
	14	19	114	0.5	1.5	20	0.064
	14	20	92	0.6	1.6	20	0.061
	15	19.4	125	0.6	1.6	20	0.061
5/8"	15	20	107	0.7	1.6	20	0.061

PVC TRANSPARENT SOFT HOSE

**APPLICATIONS:**

THE PRODUCT IS USED FOR CONVEYING WATER, OIL, GAS UNDER NORMAL WORKING CONDITION IN THE FACTORIES, FARM, SHIP, BUILDING AND FAMILY.

CHARACTERISTICS:

IT IS FLEXIBLE, DURABLE, NON-TOXIC WITHOUT DOOR, AND RESISTANT RO HIGH PRESSURE AND ERODION. BY ADDING COLORFUL SYMBOL LINES ON THE SURFACE OF THE HOSE. IT LOOKS MORE BEAUTIFUL.

WORKING TEMPERATURE:

FROM -5℃ TO + 65℃

■ The regular specification of PVC transparent soft hose

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m³
5/64"	2	4	100			1.2	
1/8"	3	5	100			1.7	
5/32"	4	6	100			2.2	
1/5"	5	9	100			5.6	0.011
1/4"	6	8	100	0.25	1.2	3	0.016
5/16"	8	10	100	0.25	1	3.8	0.018
3/8"	10	12	100	0.25	1	4.7	0.019
1/2"	12	15	50	0.2	0.9	4.3	0.021
5/8"	15	20	50	0.2	0.9	9	0.023
3/4"	19	22	50	0.2	0.9	6.55	0.047
1"	25	30	50	0.2	0.9	14.5	0.057
1-1/4"	32	38	50	0.2	0.9	22.4	0.068
1-1/2"	38	44	40	0.2	0.8	20.88	0.122
2"	50	58	40	0.2	0.8	36.64	0.226

PVC MONO-LAYER FLEXIBLE TUBE


APPLICATIONS:

THE PRODUCT IS WIDELY USED FOR TRANSPORTING LIQUID UNDER LOW WORKING PRESSURE IN AGRICULTURE, CIVIL ENGINEERING, FISHERY AND GARDENING.

CHARACTERISTICS:

BEING MADE OF HIGH QUALITY PVC MATERIAL, VERY FLEXIBLE AND ELASTIC


WORKING TEMPERATURE: FROM -10°C TO +65°C

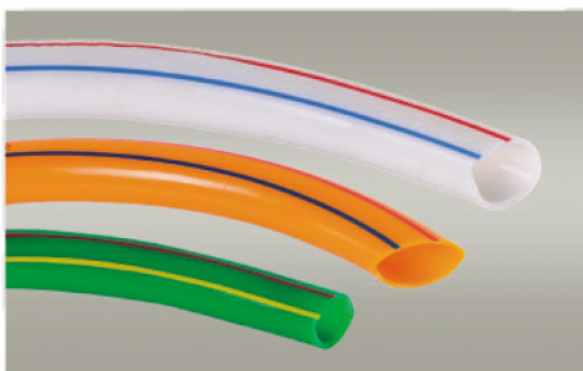

■ The regular specification of PVC mono-layer flexible tube

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m ³
1/4"	6	8	100	0.15	0.5	2.9	0.016
5/16"	8	10	100	0.15	0.4	3.8	0.018
3/8"	10	12	100	0.15	0.4	4.6	0.019
1/2"	12	15	50	0.1	0.4	4.3	0.021
5/8"	15	18	50	0.1	0.3	5.2	0.029
3/4"	19	22	50	0.1	0.3	6.5	0.047
1"	25	31	50	0.1	0.3	17.8	0.057
1-1/4"	32	38	50	0.1	0.3	22	0.067
1-1/2"	38	44	50	0.1	0.3	26	0.122

PVC SPIRAL STEEL WIRE REINFORCED HOSE

**APPLICATIONS:**

THE HOSE IS WIDELY USED FOR DRAWING AND CONVEYING WATER, OIL AND POWDER IN FACTORIES, AGRICULTURE, ENGINEERING, FOODSTUFFS AND SANITATION LINES.

CHARACTERISTICS:

THIS HOSE, WITH STEEL WIRE SCREWING INLAID IN THE HOSE, IS LIGHT, TRANSPARENT, WITH SMALL BENDING RADIUS. IT HAS GOOD ADAPTABILITY TO HARD WEATHER CONDITIONS AND MINUS PRESSURE. WITH COLORFUL SYMBOL LINES ON THE SURFACE OF THE HOSE, IT CAN BE MORE BEAUTIFUL.

WORKING TEMPERATURE:

FROM -5°C TO + 65°C

■ The nominal of PVC spiral steel wire reinforced hose

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m ³	I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m ³
5/16"	8	14	100	0.8	2	18	0.03	2"	50	57	50	0.4	1.1	50	0.307
3/8"	9	15	100	0.8	2	18.5	0.037		50	58	50	0.4	1.1	55	0.31
1/2"	12	18	100	0.6	1.8	22	0.051		50	59.6	50	0.4	1.1	60	0.31
5/8"	15	22	100	0.6	1.8	30	0.084		50	62	50	0.4	1.1	80	0.33
3/4"	19	26	50	0.5	1.5	17.5	0.063	2-1/2"	64	70	30	0.4	1.1	36	0.331
	20	24.6	50	0.5	1.5	12.5	0.076		64	72.4	30	0.4	1.1	42	0.331
	20	25.4	50	0.5	1.5	15	0.076		64	73.5	30	0.4	1.1	48	0.331
1"	25	29	50	0.5	1.5	12.5	0.085		64	74	30	0.4	1.1	54	0.331
	25	29.4	50	0.5	1.5	15	0.085		64	80	30	0.4	1.1	84	0.335
	25	31.6	50	0.5	1.5	20	0.089	3"	75	81.8	30	0.3	0.8	42	0.375
	25	31.8	50	0.5	1.5	25	0.089		75	82.4	30	0.3	0.8	48	0.375
	25	33	50	0.5	1.5	27	0.098		75	83.6	30	0.3	0.8	54	0.375
1-1/4"	32	36.6	50	0.5	1.5	20	0.129		75	85	30	0.3	0.8	60	0.421
	32	37	50	0.5	1.5	25	0.129		75	85.8	30	0.3	0.8	66	0.463
	32	40.2	50	0.4	1.1	32.5	0.166		75	92	30	0.3	0.8	105	0.47
	32	41	50	0.4	1.1	38	0.166	3-1/2"	89	100	30	0.3	0.8	75	0.547
1-1/2"	38	42	50	0.4	1.1	20	0.224	4"	102	110	30	0.3	0.8	75	0.703
	38	42.8	50	0.4	1.1	25	0.224		102	110.8	30	0.3	0.8	81	0.599
	38	44.6	50	0.4	1.1	35	0.224		102	112	30	0.3	0.8	90	0.599
	38	46	50	0.4	1.1	45	0.231		102	114.2	30	0.3	0.8	105	0.613
	38	48	50	0.4	1.1	52.5	0.231		102	114.6	30	0.3	0.8	120	0.627
1-3/4"	45	52.8	50	0.4	1.1	40	0.243		102	120	30	0.3	0.8	144	0.63
	45	53	50	0.4	1.1	50	0.271		102	121.6	30	0.3	0.8	150	0.641
1-7/8"	48	57.8	50	0.4	1.1	55	0.289		108	118	30	0.3	0.8	96	0.615
2"	50	56	50	0.4	1.1	35	0.307		108	120	30	0.3	0.8	105	0.616
	50	56.4	50	0.4	1.1	40	0.307	5"	127	141	20	0.2	0.6	100	0.892
	50	56.8	50	0.4	1.1	45	0.307	6"	152	166	20	0.2	0.6	130	1.243

PVC FIBER AND STEEL WIRE REINFORCED HOSE


APPLICATIONS:

THE HOSE IS AVAILABLE FOR TRANSPORTING LIQUID, GAS AND POWDER UNDER HIGH WORKING PRESSURE

CHARACTERISTICS:

THIS HOSE IS MADE WITH STEEL WIRE SCREWING INLAID IN THE HOSES, AND HIGH QUALITY FIBER REINFORCED BY ADVANCED TECHNOLOGY, CAN KEEP ITS SHAPE AND WORKING NORMALLY UNDER HIGH PRESSURE AS WELL AS MINUS PRESSURE CONDITIONS. BY ADDING COLORFUL SYMBOL LINES ON THE SURFACE OF THE HOSES, THAT LOOKED MORE BEAUTIFUL

WORKING TEMPERATURE: FROM -5°C TO +65°C

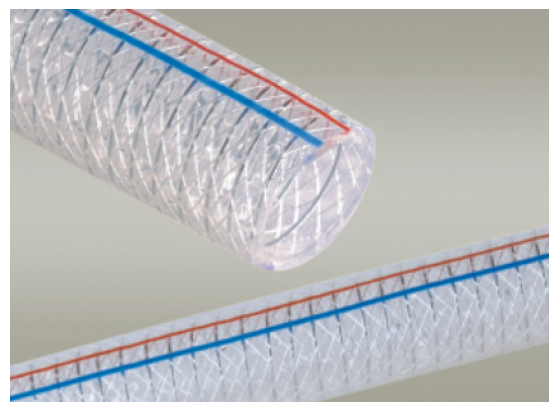

■ The regular specification of PVC fiber and steel wire reinforced hose

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m ³
1"	25	32	50	0.1-0.8	2.5	24	0.087
1-1/4"	32	40	40	0.1-0.8	2.3	28	0.19
1-1/2"	38	47	40	0.1-0.7	2.2	36	0.181
2"	50	61	40	0.1-0.7	2	57.5	0.26
2-1/2"	64	78	20	0.1-0.7	2	47.3	0.24
3"	75	90	20	0.1-0.6	1.8	58.3	0.447
3-1/2"	90	106	20	0.1-0.5	1.5	74	0.494
4"	100	116	20	0.1-0.5	1.5	82	0.476

PVC SHOWER HOSE



APPLICATIONS:

THE HOSE IS USED AS ACCESSORY FOR SHOWER AND SANITARY WARES

CHARACTERISTICS:

BEING COLORFUL, FLEXIBLE, ELASTIC, DURABLE, NON-TOXIC, ADAPTABLE TO HIGH TEMPERATURE AND HIGH PRESSURE CONDITIONS.

WORKING TEMPERATURE: FROM -5°C TO +70°C

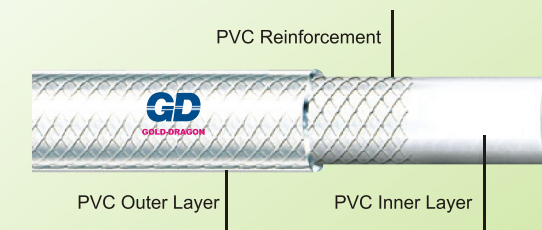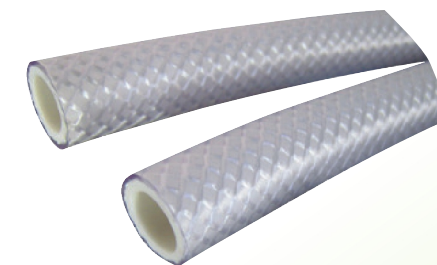

■ The nominal of PVC shower hose

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m ³
5/16"	8	14	100	0.8	2.4	12.7	0.027
3/8"	9	14	100	0.7	2	12.2	0.027

PVC AIR HOSE



PVC SPECIALIZED AIR HOSE

APPLICATIONS:


THE HOSE IS WIDELY USED IN PNEUMATIC TOOLS, PNEUMATIC WASHING APPARATUS, COMPRESSORS, ENGINE COMPONENTS, MACHINE SERVICE AND CIVIL ENGINEERING EQUIPMENTS.

CHARACTERISTICS:

BEING MADE OF TOUGH PVC MATERIALS HIGH TENSILE POLYESTER REINFORCEMENT, THIS HOSE CAN WORK UNDER VERY HIGH WORKING PRESSURE. IT IS LIGHT, FLEXIBLE, DURABLE, ANTI-EROSION, AND EXPLOSION RESISTANT.

WORKING TEMPERATURE:

FROM -5°C TO + 65°C

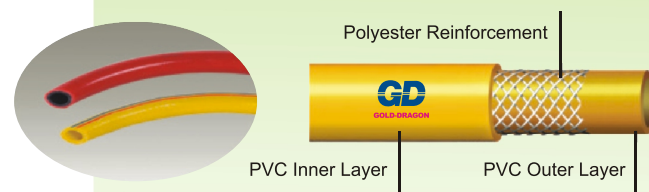

The Nominal of PVC Specialized Air Hose

British Measurement	Metric Measurement		Length	W.P.	B.P.	Weight	Volume
	I.D.	O.D.					
inch	mm	mm	m	MPa	MPa	kg/roll	m ³
1/4	6	11	100	2	9.0	9.10	0.038
5/16	8.5	14	100	2	8.5	13.5	0.065
3/8	10	16	100	1.8	8.0	16.60	0.075
1/2	13	20	100	1.8	7.5	24.80	0.085
5/8	16	25	50	1.7	6.0	19.60	0.056
3/4	19	28	50	1.5	5.2	21.50	00.67
1	25	34	50	1.5	4.5	27.50	0.090

PVC AIR HOSE

PVC AIR HOSE ASSEMBLIES

1. Yellow Pvc air hoses assemblies: w.p 300psi, b.p. 1200psi

CONSTRUCTION: OIL AND ABRASION RESISTANT TUBE/COVER, FLEXIBLE/KINK RESISTANT CONSTRUCTION, EXCELLENT TEMPERATURE RANGE AND A HIGH VISIBILITY "SAFETY YELLOW" COVER.

COUPLED: 1/4" BRASS MALE PIPE THREAD ON EACH END. BEND RESTRICTORS EXTEND SERVICE LIFE.



2. Orange Pvc air hose assemblies: w.p 450psi, b.p 1350psi

CONSTRUCTION: PREMIUM PVC AIR HOSE FEATURES OIL AND ABRASION RESISTANT TUBE AND COVER, FLEXIBLE/KINK PROOF CONSTRUCTION, AND EXCELLENT TEMPERATURE RANGE. BEND RESTRICTORS EXTEND SERVICE LIFE.

COUPLED: 1/4" BRASS MALE PIPE THREAD WITH TWO BEND RESTRICTORS: 1 WIRE AND 1 PVC.



3. Blue pvc air hose assemblies: w.p 450psi, b.p 1350psi

CONSTRUCTION: PREMIUM PVC AIR HOSE FEATURES OIL AND ABRASION RESISTANT TUBE AND COVER, FLEXIBLE/KINK PROOF CONSTRUCTION, AND EXCELLENT TEMPERATURE RANGE. BEND RESTRICTORS EXTEND SERVICE LIFE.

COUPLED: 1/4" BRASS MALE PIPE THREAD INCLUDES 1 PVC BEND RESTRICTOR



4. Black pvc air hose assemblies: w.p. 450psi, b.p. 1350psi

CONSTRUCTION: OIL AND ABRASION RESISTANT TUBE/COVER, FLEXIBLE/KINK RESISTANT CONSTRUCTION, EXCELLENT TEMPERATURE RANGE AND A HIGH VISIBILITY "SAFETY YELLOW" COVER.

COUPLED: 1/4" BRASS MALE PIPE THREAD X 1/4" BRASS FEMALE PIPE THREAD



PACKAGE: SKIN PACKED WITH A POINT OF PURCHASE COLOR LABEL FOR CONVENIENT RETAIL SALE. BULK, CARTON, PALLET AS PER BUYER'S REQUEST

■ Popular sizes: 1/4" x 25' 1/4" x 50' 3/8" x 25' 3/8" x 50' 1/2" x 25' 1/2" X 50'

PVC MIXED RUBBER AIR HOSE

APPLICATIONS:

FOR TRANSPORTATION OF AIR, OXYGEN, ACETYLENE ETC

INNER TUBE: PVC MIXED RUBBER

REINFORCEMENT: HIGH TENSILE STRENGTH POLYESTER

COVER: PVC MIXED RUBBER

TEMPERATURE: -40°C TO + 70°C

COLOR: RED, BLUE, GREEN ETC

CHARACTERISTIC: THE HOSE LOOKS SIMILAR AS RUBBER MATERIAL, IT CAN RESIST MORE COLD

TEMPERATURE: CAN WORK WITH MORE HIGHER PRESSURE

1. SINGLE FIBER LAYER REINFORCED: WP 20BARS, BP 60BARS



2. TWO FIBER LAYER REINFORCED: WP 40-50BARS, BP 120-150BARS



■ The regular specification of PVC air hose

British Measurement inch	Metric Measurement		Length m	W.P. MPa	B.P. MPa	Weight kg/roll	Volume m ³
	I.D.	O.D.					
	mm	mm					
1/4"	6	11	100	2	6	9.1	0.038
5/16"	8.5	14	100	2	6	13.5	0.065
3/8"	10	16	100	2	6	16.6	0.075
1/2"	13	20	100	2	6	24.8	0.085

PVC OXYGEN & ACETYLENE DUPLEX HOSE



APPLICATIONS:

BEING WIDELY USED IN WELDING MACHINE, ARCHITECTURE AND LACQUER FACTORY.

CHARACTERISTICS:

TWO TUBES WELDER TOGETHER, LIGHT, ELASTIC, EASY TO HANDLE, ANTI-EROSION, RESISTANT TO FIRE, AND EASY TO DISTINGUISH DUE TO THE DIFFERENT COLORS OF THE TUBE.

WORKING TEMPERATURE: FROM -5°C TO +65°C

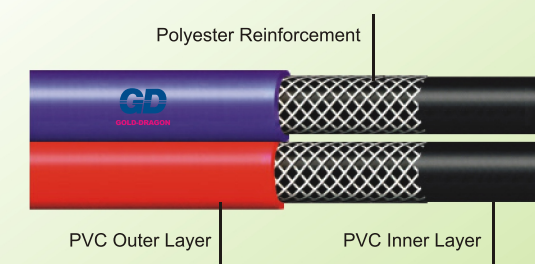

■ The regular specification of PVC oxygen & Acetylene Duplex hose

British Measurement	Metric Measurement		Length	W.P.		B.P.		Weight
	I.D.	O.D.		MPa		MPa		
	inch	mm		mm	m	Oxygen	Acetylene	
1/5"	5	11.6	50	2.0	1.0	6.0	3.0	11.7
1/4"	6.3	13	50	2.0	1.0	6.0	3.0	13.7
5/16"	8	15	30	2.0	1.0	6.0	3.0	10.3
3/8"	10	17	30	2.0	1.0	6.0	3.0	12.1

PVC SUCTION HOSE

MADE OF TRANSPARENT SOFT
AND RAGID PVC


APPLICATIONS:

FOR WATER DELIVERY/SUCTION
IN INDUSTRY AND AGRICULTURE



The nominal of PVC suction hose

I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	Weight kg/roll	I.D. inch	I.D. mm	O.D. mm	Length m	W.P. MPa	Weight kg/roll
1/2"	12	16.47	50	9.5	108	2"	50	58	50	6	738
5/8"	15	20	50	9.5	154	2-1/2"	65	74	50	5.5	984
3/4"	19	24	50	9	186	3"	75	84	50	4.5	1242
1"	25	31	50	8.5	272	3-1/2"	90	100	50	4	1630
1-1/4"	32	38	50	8	350	4"	100	110	50	3.5	1794
1-1/2"	38	45	50	7	462	5"	125	136	30	3	2358
1-3/4"	45	53	50	7	650	6"	150	165	30	2	3978

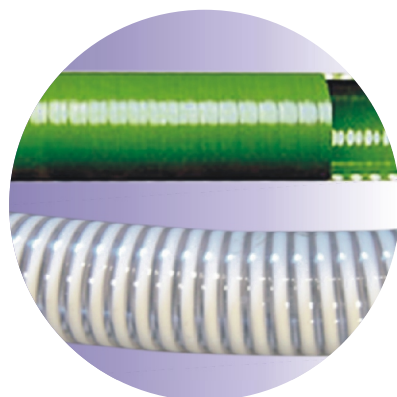

Metric Measurement		W.P.	Weight	Standard Length
I.D. inch	O.D. inch	psi	lbs/100ft	ft/rl
3/4	1	90	20	100
1	1.22	90	26	100
1-1/4	1.5	80	37	100
4-1/2	1.79	75	44	100
2	2.3	75	67	100
2-1/2	2.9	75	90	100
3	3.55	65	114	100
4	4.47	55	181	100/50
6	6.6	35	336	100/25/20

FIRE HOSE

1. REINFORCED WITH RUBBER

CHARACTERISTICS:


SIZE RANGE: 1.5"---8"

REINFORCEMENT: RUBBER

RUBBER COLOR: BLACK, RED, OR CREAM

W.P.: 6BARS, 8BARS, 10 BARS AND 13 BARS

PACKAGE: PP BAG OR CARTON,
OR AS PER BUYER'S REQUEST

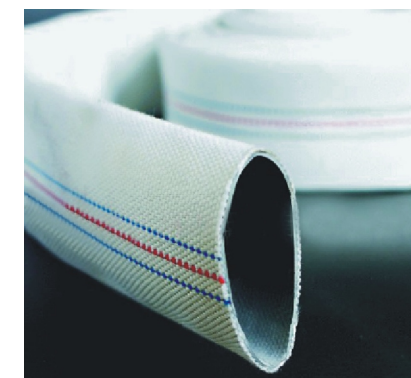

2. REINFORCED WITH PVC OR PU

THE SHELL USES THE GOOD QUALITY FIBER,AND THE INNER PART USES GOOD PVC
WHICH IS ANTI-HIGH TEMPERATURE, ANTI HIGH PRESSURE AND ANTI-AGING.IT IS
USED IN LINE OF FIRE FIGHTING, IRRIG-ATION, AND CONSTRUCTION.

CHARACTERISTICS:


SIZE RANGE: 1.5"---8"

REINFORCEMENT: PVC or TPU

COLOR: CLEAR, RED OR BLUE ETC

W.P.: 6BARS, 8BARS, 10 BARS AND 13 BARS

PACKAGE: PP BAG OR CARTON, AS PER BUYER'S REQUEST

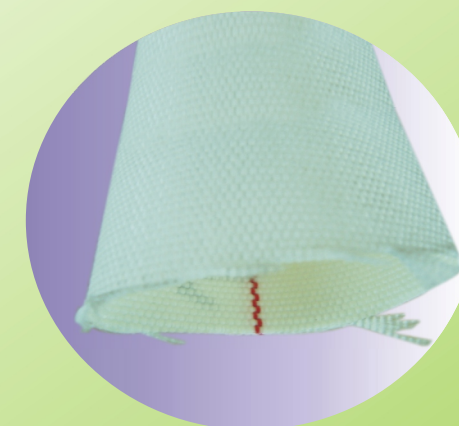



PVC LAYFLAT HOSE

1. COMMON QUALITY



I.D. inch	Weight kg/m			
	W.P.2 BAR	W.P.3 BAR	W.P.4 BAR	W.P.6 BAR
1	0.13	0.155	0.16	0.17
1-1/4	0.14	0.15	0.18	0.195
1-1/2	0.18	0.23	0.26	0.3
2	0.24	0.3	0.35	0.37
2-1/2	0.31	0.38	0.47	0.55
3	0.37	0.46	0.58	0.6
4	0.5	0.62	0.72	0.8
5	0.72	0.85	0.95	1.1
6	0.9	1.05	1.2	1.4
8	1.5	1.55	1.7	1.9

2. HIGH QUALITY:
PRODUCTION STYLE SAME AS JAPAN STYLE

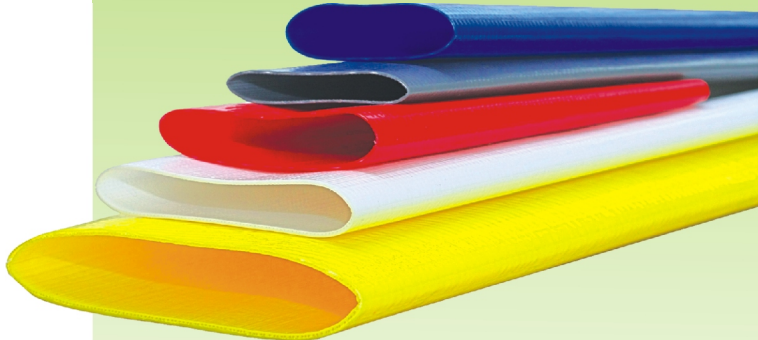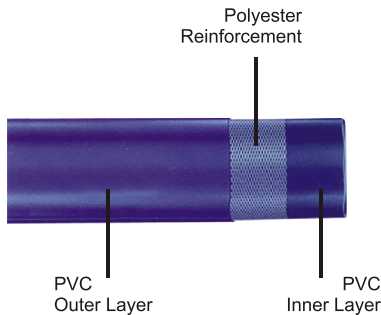

APPLICATIONS:

SUITABLE FOR CONVEYING LIQUID MATERIALS IN INDUSTRY, AGRICULTURE IRRGATION, MINES AND CIVIL ENGINE-ERING.

CHARACTERISTICS:

CHOOSING HIGH STRENGTH POLYESTER FILAMENT AND HIGH QUALITY PVC, IT IS SUCCESSIVELY WINDED, PARTED THE THREADS REGULARLY AND MOLDED BY PLASTIC COATED ONCE. WITH AN ATTRACTIVE APPEARANCE, SOFT SURFACE AND LIGHT WEIGHT, HIGH BURST PRESSURE AND LONG SERVICE LIFE, THE PRODUCT IS ACID & ALKALI RESISTANT, AGING RESISTANT, STRETCHING RESISTANT, ANTI-WRINKLE, NON-TOXIC, FLAVORLESS AND ENVIRONMENTAL PROTECTION.

WORKING TEMPERATURE:

FROM -5℃ TO + 65℃



PVC优质高压水带（4bar水带） PVC QUALITY HIGH-PRESSURE LAYFLAT HOSE(4bar)

英制尺寸	公制尺寸 mm			工作压力 W.P.	爆破压力 B.P.	重量	包装尺寸 Packing measurement	体 积
	Inch	I.D.mm	O.D.mm	m/roll	At 23 ℃ BAR	BAR	Kg/roll	D x H cm m ³
1"	26	1.3	100	4	12	15	67x5	0.022
1-1/4"	33	1.2	100	4	12	17	64x6	0.025
1-1/2"	41	1.25	100	5	15	20.5	63x7	0.028
2"	53	1	100	4	12	23	60x9	0.032
2.5"	66	1.15	100	4	12	32	64x12	0.049
3"	78	1.05	100	4	12	36	64x14	0.057
4"	104	1.2	100	4	12	55	67x18	0.036
5"	128	1.35	100	4	12	75	68x22	0.102
6"	155	1.35	100	4	12	90	68x26	0.120
8"	207	2.2	100	3	9	178.5	79x34	0.212
10"	257	2.65	100	2.5	7.5	265	85x42	0.303
12"	308	2.55	100	2	6	291	85x50	0.361

PVC优质高压水带（6bar水带） PVC QUALITY HIGH-PRESSURE LAYFLAT HOSE(6bar)

英制尺寸	公制尺寸 mm			工作压力 W.P.	爆破压力 B.P.	重量	包装尺寸 Packing measurement	体 积
	Inch	I.D.mm	O.D.mm	m/roll	At 23 ℃ BAR	BAR	Kg/roll	D x H cm m ³
3/4"	20	1.35	100	7	21	11.2	67x3.5	0.016
1"	26	1.5	100	7	21	16.5	68x5	0.023
1-1/4"	33	1.3	100	7	21	19	68x6	0.028
1-1/2"	41	1.45	100	7	21	23	67x7	0.031
2"	53	1.3	100	6	18	30	66x9	0.039
2.5"	66	1.7	100	7	21	43	72x11	0.057
3"	78	1.45	100	6	18	50	73x13	0.069
4"	104	2.3	100	6	18	86.5	77x18	0.107
5"	128	2.3	100	6	18	108	78x22	0.134
6"	155	2.4	100	6	18	160	84x26	0.183
8"	207	2.65	100	4	12	202	83x34	0.234

PVC优质高压水带（重型水带） PVC QUALITY HIGH-PRESSURE LAYFLAT HOSE(Heavy Duty)

英制尺寸	公制尺寸 mm			工作压力 W.P.	爆破压力 B.P.	重量	包装尺寸 Packing measurement	体 积
	Inch	I.D.mm	O.D.mm	m/roll	At 23 ℃ BAR	BAR	Kg/roll	D x H cm m ³
3/4"	20	1.55	50	10.5	31.5	14	51x4	0.010
1"	26	1.7	50	10.5	31.5	20	53x5	0.014
1-1/4"	33	1.45	50	10.5	31.5	21	49x6	0.014
1-1/2"	41	1.9	50	10.5	31.5	29	51.5x7.5	0.020
1-3/4"	45	1.6	50	8	24	32	51.5x8	0.021
1-3/4"	45	2	50	10.5	31.5	35	53x8	0.022
2"	53	1.5	50	8	24	35	57x8	0.026
2"	53	2.05	50	10.5	31.5	42	57x9	0.029
2.5"	66	2.15	50	10.5	31.5	54	61x11.5	0.043
3"	78	2.25	50	9	27	66	62x13	0.050
3"	78	2.5	50	10	30	85	62x14	0.054
4"	104	2.55	50	9	27	100	63x18	0.071
6"	155	3	50	6	18	200	68x26	0.120
8"	207	2.95	50	5	15	220	63x34	0.135
8"	207	3.15	50	6	18	280	70x35	0.172

PVC GARDEN HOSE


EVA HOSES



GD1001
EVA COIL HOSE W/PLASTIC COUPLINGS&5" NOZZLE



GD1003
EVA COIL HOSE W/BRASS FITTING
&PLASTIC QUICK COULING & 5" NOZZLE

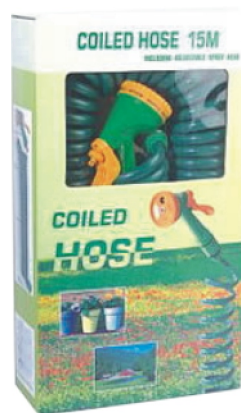

GD2001
EVA COIL HOSE W/PLASTIC COUPLINGS
& 4 FUNCTION SPRAY NOZZLE
PACKING: COLOR BOX



GD1002(50FT)
EVA COIL HOSE W/PLASTIC COUPLINGS
& 4 FUNCTION SPRAY NOZZLE




GD1004
EVA COIL HOSE W/BRASS FITTINGS
& PLASTIC COUPLING
& 4 FUNCTION SPRAY NOZZLE



GD2005(50FT)
EVA COIL HOSE W/PLASTIC COUPLINGS
& 6 FUNCTION
SPRAT NOZZLE
PACKING:BLISTER CARD

POCKET HOSE

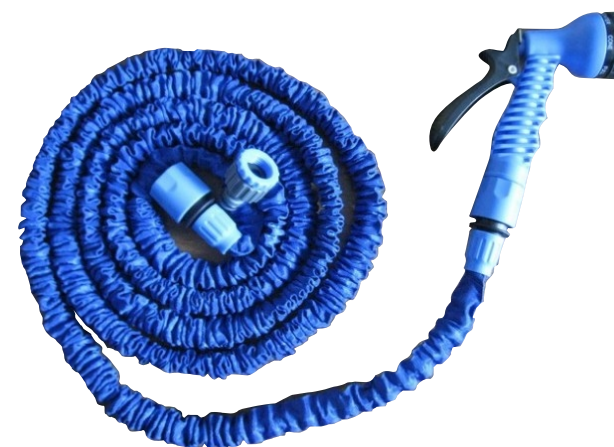

WITH 7 FUNCTION SPRAY GUN & QUICK PLASTIC CONNECTORS , WITH INNER COLOR BOX.

■ Popular sizes: 1/2" x 25ft 1/2" x 50ft 1/2" x 75ft 1/2" x 100ft



SOAKER HOSE




Popular sizes:

3/8" x 25ft	1/2" x 25ft	5/8" x 25ft
3/8" x 50ft	1/2" x 50ft	5/8" x 50ft
3/8" x 75ft	1/2" x 75ft	5/8" x 75ft
3/8" x 100ft	1/2" x 100ft	5/8" x 100ft



Products Description

Packing: 1PCS/COLOR SLEEVE
7.5M-36PCS 57.5*27*27cm 11.5/12kg

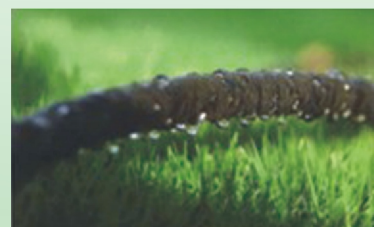

Products Description

Packing: 1PCS/COLOR SLEEVE
15M-36PCS 64*38*38cm 23/24kg

PLASTIC FITTING



GD2801



GD2804



GD2805



GD2806



GD2807



GD2808



GD2809



GD2810



GD3801




GD3802




GD3804



GD3809



GD3810



GD3811



GD3812



GD3813

PLASTIC FITTING



GD3814



GD3815



GD3816



GD3818



GD3820



GD3823



GD3824



GD3826



GD6801



GD6802



GD6805



GD6808



GD6812



GD6814



GD6815



GD6817

PLASTIC FITTING



GD6818



GD6819



GD7801



GD7802



GD7803



GD7804



GD7805



GD7806



GD7807



GD7808



GD7809



GD7810



GD7811



GD7812



GD7813



GD7814


PLASTIC FITTING




GD7815



GD7816



GD7817




GD7818



GD7822



GD7823



GD7824



GD7825



GD4060



GD4064



GD4070



GD8801



GD8802



GD8803

BRASS FITTING



GD5801



GD5802



GD5803




GD5804




GD5805



GD5806



GD5807



GD5809



GD8801



GD8802




GD8803



GD8804



GD8805

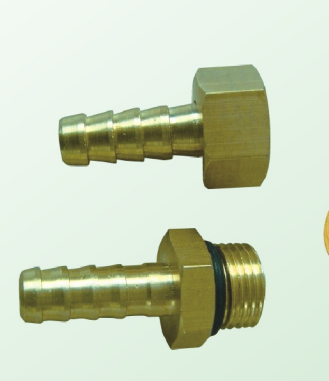

GD8806



GD8807



GD8808

CAM AND GROOVE COUPLINGS



A



B



C



D



E



F



DC



DP



G



American type



Female N.P.T. ends



Hose end



Item D



Male N.P.T. ends

NOTE:

